

A perspective view of a mechanical assembly 1 according to the invention. The assembly includes two parallel guide rails 4 and 5. A first sliding member 6 is mounted on rail 4 and carries a rectangular block B. A second sliding member 7 is mounted on rail 5 and carries another rectangular block C. Both blocks are connected by a linkage mechanism involving rods 8, 9, 10, 10a, 10b and joints 2, 3, 11.

FIG. 2

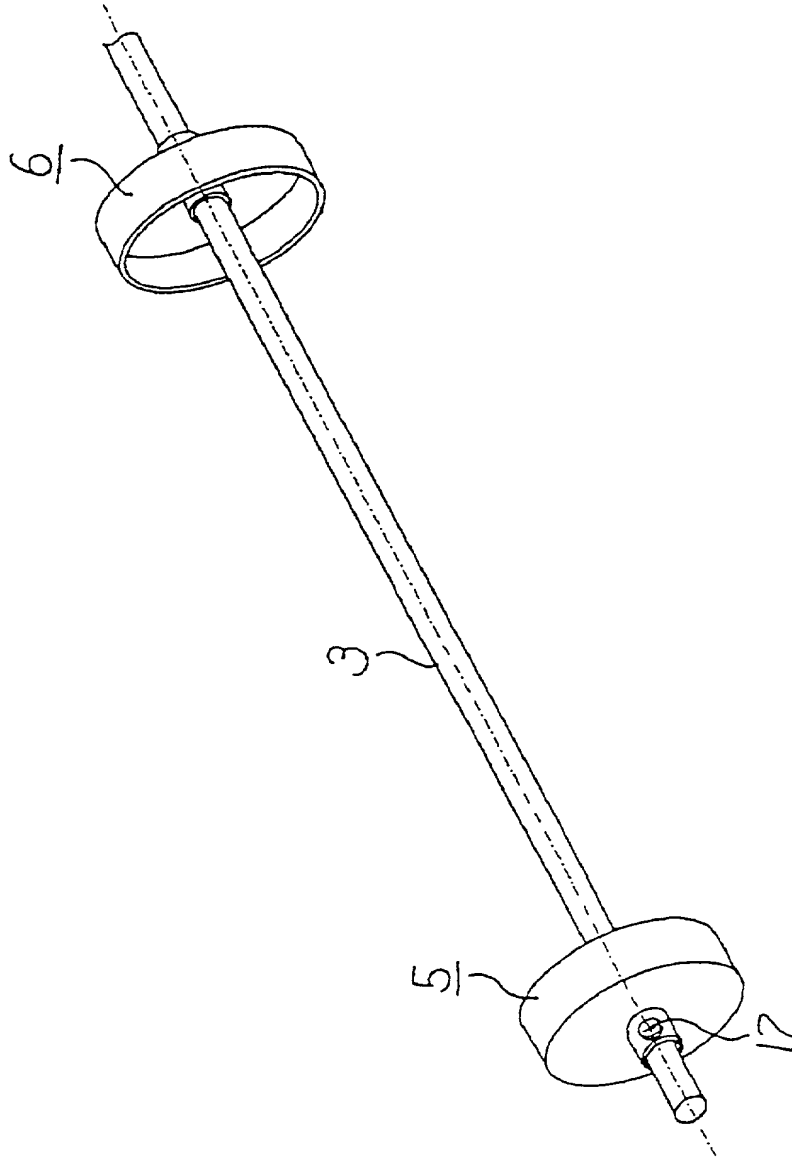


FIG. 3

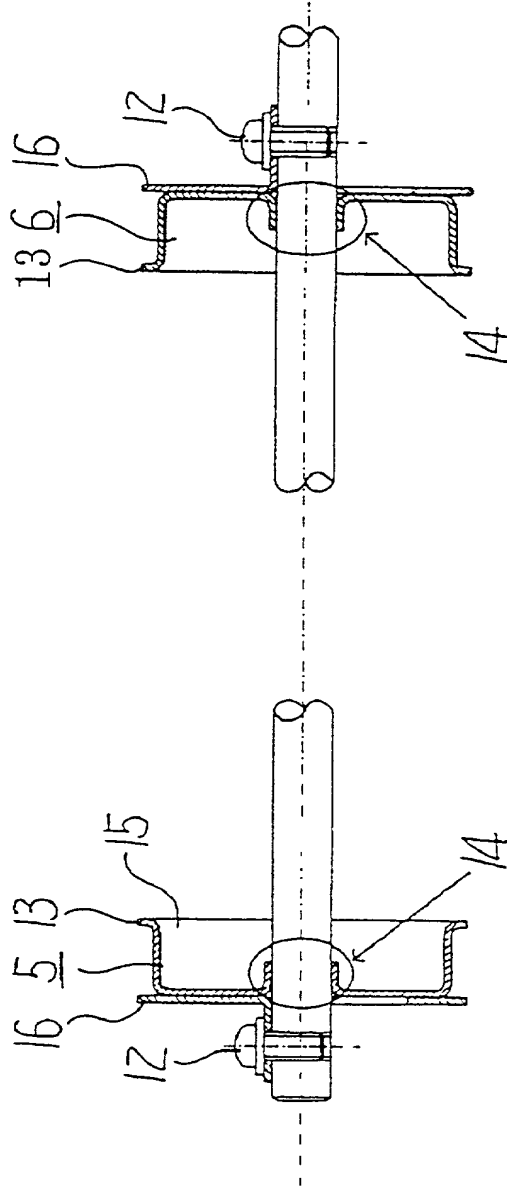


FIG. 4

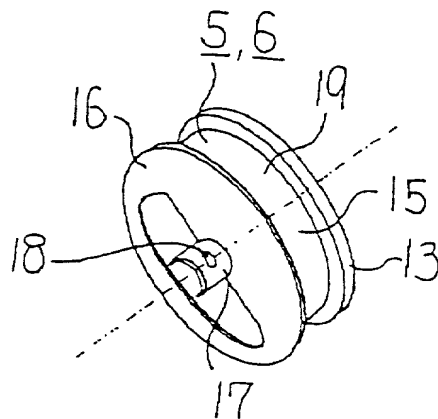


FIG. 5

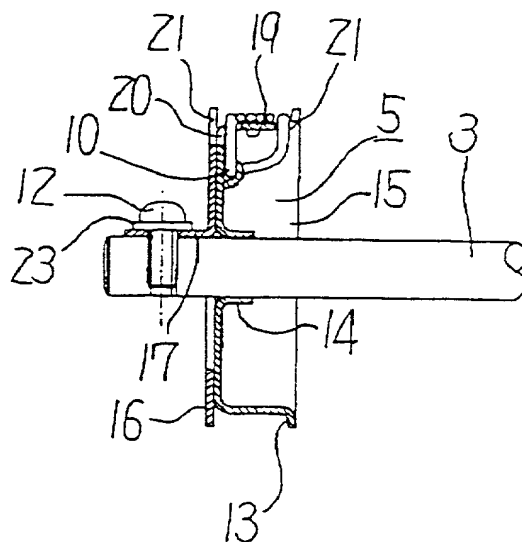


FIG. 6A

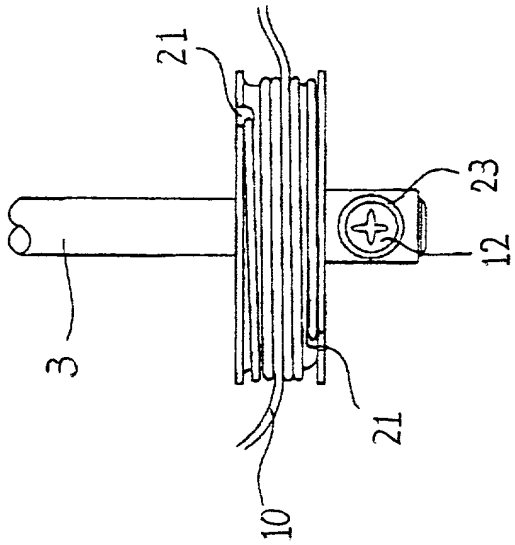


FIG. 6B

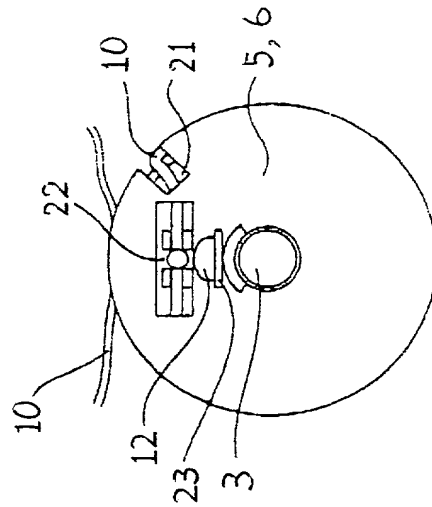


FIG. 6C

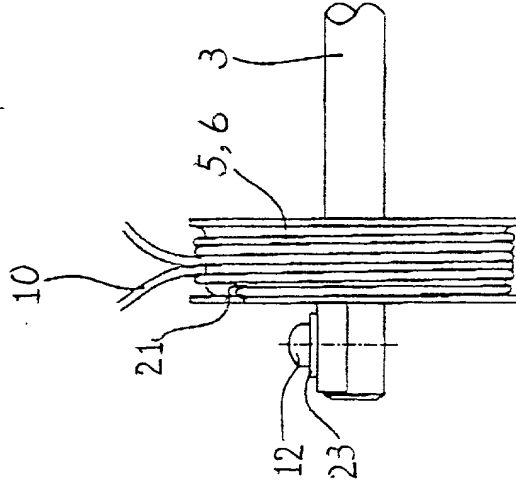


FIG. 6D


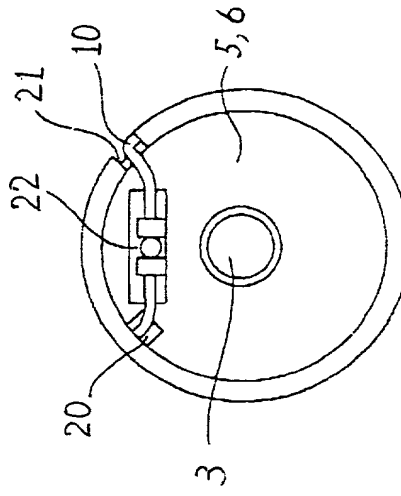


FIG. 7

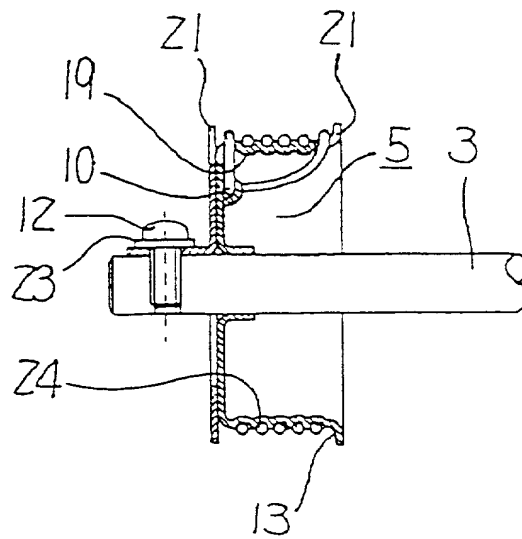

2025/03/20 10:00

FIG. 8

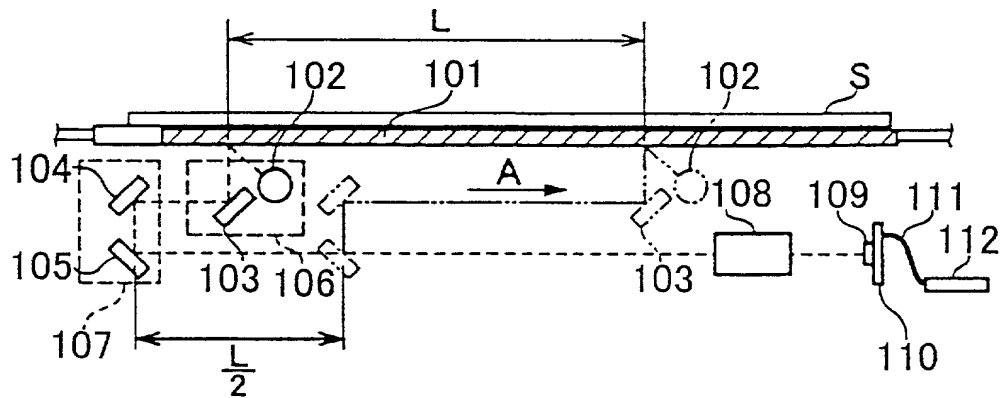


FIG. 9


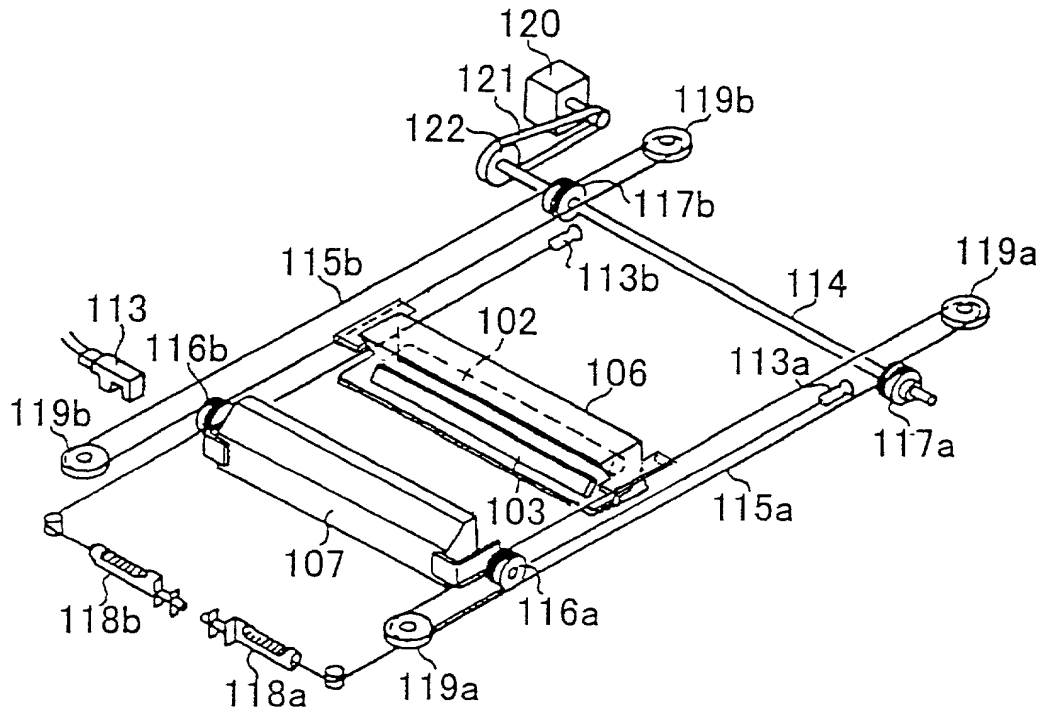




FIG. 10

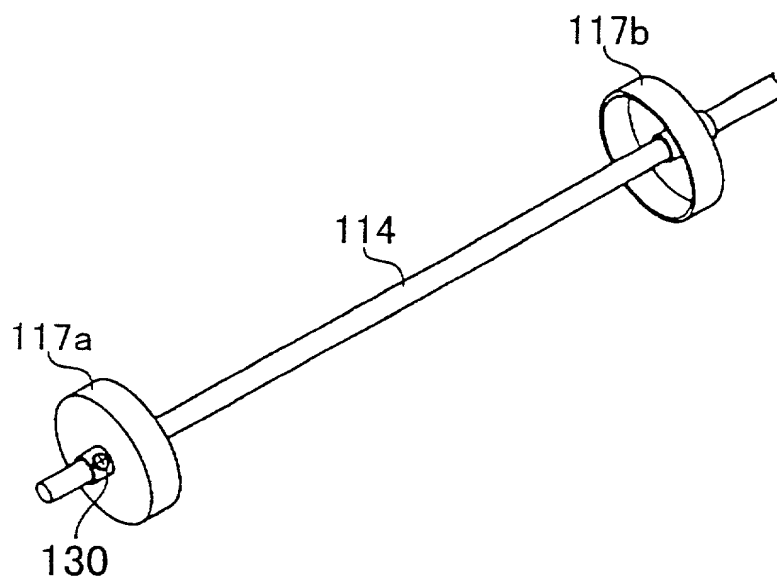

20250827001

FIG. 11

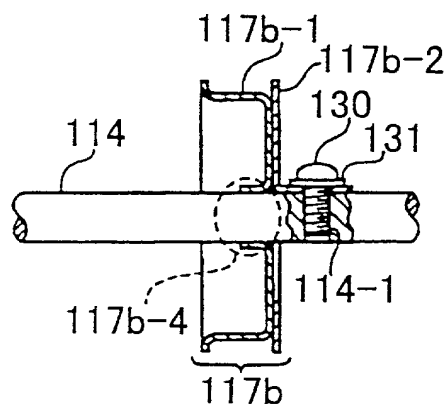
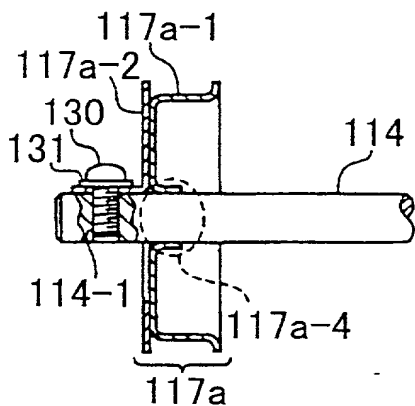


FIG. 12

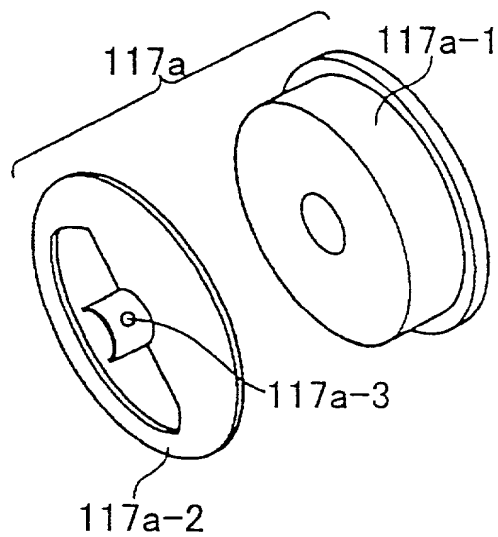


FIG. 13

